





Item	Test Result	Test Method
Composition	Polyester + PVC	
Weight (GSM)	400gsm (± 5%)	GB/T4669-2008
Thickness	0.50mm (± 5%)	DIN53354:1981
Openness Factor	3%	GB/T18830-2009
Tensile Strength	Warp 3200N/5cm (± 5%) ; Weft 3000N/5cm (± 5%)	EN ISO 1421
Tearing Strength	Warp 600N/5cm (± 5%) ; Weft 500N/5cm (± 5%)	DIN 53363
Tensile Strength	Warp 3200N/5cm (± 5%) ; Weft 3000N/5cm (± 5%)	EN ISO 1421
Tearing Strength	Warp 600N/5cm (± 5%) ; Weft 500N/5cm (± 5%)	DIN 53363
Abrasion Resistance	> 10000	ASTM D4966
Light Fastness	7	GB/T8427-2008 / ISO 105 B02/ATCC
FR Certification	B1/NFPA701	DIN4102 /NFPA701
Environment	J/T307-2006 OEKO-TEX STANDARD 100CLASS ZV GREEN GUARD ECOSPECIFIER CETEC ROHS	
Width	2.0M / 2.5M / 3.0M , etc	
Cleaning	Self-cleaning	

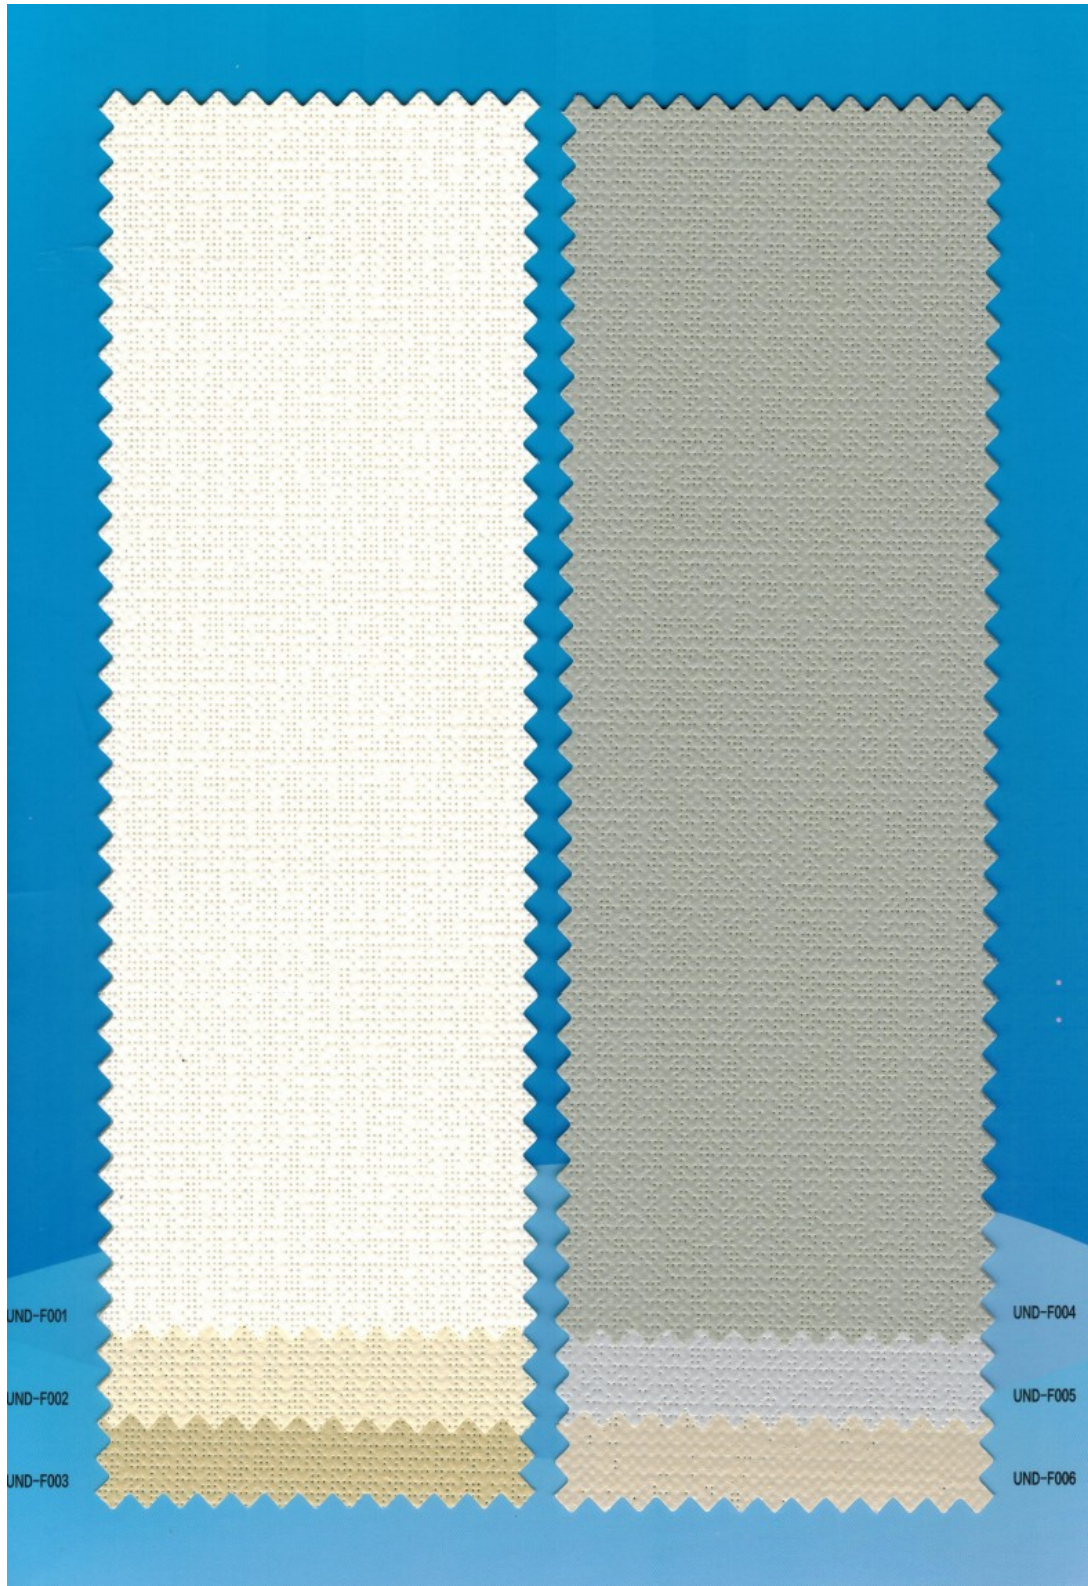

Pol.Ind. Can Sedó
C/ Continues 23 1º 2ª
08292 Esparreguera
Barcelona

<https://lonasyaccesorios.com>
comercial@lonasyaccesorios.com emilio.lonas@gmail.com
Tel. Y Whatsapp :  (+34) 607536970